



# **DESCRIPTION:**

PEAK® AUTOMATIC TRANSMISSION FLUID is formulated with select highly refined base oils and specially balanced additives to meet the demands placed on automatic transmissions. PEAK® AUTOMATIC TRANSMISSION FLUID contains special friction modifiers that provide smooth lock-ups required by both General Motors and Ford. Its high viscosity index permits use over a wide temperature range by providing excellent low temperature fluidity while retaining the desired viscosity at high temperatures.


### **BENEFITS:**

- Helps provide smooth shift performance where DEXRON® III or a MERCON® fluid is specified
- Designed to provide outstanding high temperature oxidation resistance
- · Offers excellent protection against corrosion, wear and rust
- Compatible with automatic transmission components such as elastomer seals and plastic parts

# **APPLICATION:**

PEAK® AUTOMATIC TRANSMISSION FLUID is recommended for use in automatic transmissions of General Motors, Ford (except those that specify Ford M2C33-F Type F fluids) and other U.S. and import vehicles requiring DEXRON III, DEXRON IIE, DEXRON II and MERCON ATF. It may also be used in Allison automatic transmissions, including those that require C-4 fluids, and Caterpillar transmissions requiring TO-2 performance.

Always consult your owner's manual for automatic transmission fluid requirements.

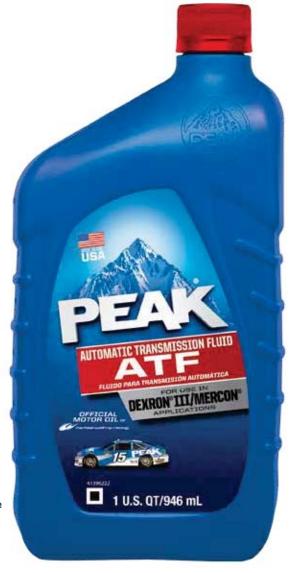

#### **SHIPPING INFORMATION:**

CITT I THE THE CHARACTER	<b>.</b> .			
Pack	6/1 Quart	3/1 Gallon	5 Gallon Pail	55 Gallon Drum
Unit Weight (lbs.)	2.1	8.15	40.6	450
Case/Pallet Weight*	12.3/2,108	24.45/1,517	1,755.2	1,850
Units per Pallet	1,008	180	42	4
Cases per Pallet	168	60	-	-
Units per Truck	21168	3,780	882	84
Cases/Pallets per Truck	3528/21	1,260/21	21	21
Case Size (inches)	8.9 x 7.4 x 8.8	$12.5 \times 7.9 \times 11.9$	-	-
Cases per row/Rows high	24/7	15/4	14/3	-
Pallet Size (inches)	48 x 40 x 72.3	48 x 40 x 55.8	44 x 49 x 51.1	46 x 48 x 40.5

(\*) Including pallet weight of 50lbs.

#### PRODUCT INFORMATION:

Test (Method)	ATF Dexron®III/Mercon®			ATF Dexron®III/Mercon®
API Gravity (ASTM D-1298)	32.98		1 Quart Part Number	PDT0076
Flash Point, °C (ASTM D-93)	192		1 Gallon Part Number	PDT003
Pour Point, °C (ASTM D-97)	-46		Bulk	PDT000
Viscosity			5 Gallon Pail	PDT005
'@ 40 °С, cSt (ASTM D-445)	35.22		55 Gallon Drum	PDT001
'@ 100 °С, cSt (ASTM D-445)	7.29			
Viscosity Index (ASTM D-2270)	179			
	PDT0076	PDT003	PDT005	PDT001
Individual UPC Code	0-74804-01314-6	0-74804-05178-0	0-74804-02054-0	0-74804-03403-5
Case UPC Code	0-74804-14803-9	0-74804-15178-7	-	-
Case SCC-14 Code	1-00-74804-04803-9	1-00-74804-05178-7	-	-





