MADE IN THE USA

PEAK® SYNTHETIC BLEND MOTOR OIL

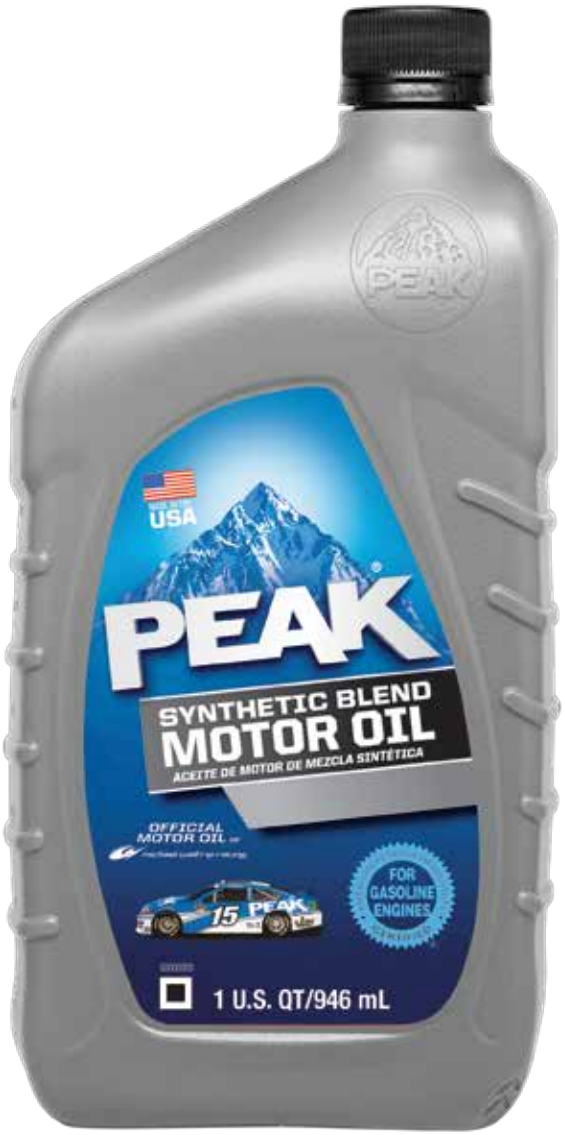

DESCRIPTION:

PEAK® SYNTHETIC BLEND MOTOR OILS formulated with FMX offer superior oxidation stability, extra protection against heavy load conditions, additional high temperature protection, and better cold weather properties than conventional motor oils. This combination provides increased protection for tough driving conditions that put stress and demands on your engine.

BENEFITS:

- Advanced synthetic blend offers better anti-oxidancy, sludge control and TBN retention
- For Everyday Use
- Exceeds protection requirements of all major OEMs where API SN oils are recommended
- Compatible with leading conventional and synthetic motor oils
- Formulated with a new ZDDP additive for extended wear performance

APPLICATION:

PEAK® SYNTHETIC BLEND MOTOR OIL is recommended for use in all gasoline engines (including turbocharged), in passenger cars, light-duty trucks, vans and sport utility vehicles. PEAK® SYNTHETIC BLEND MOTOR OIL SAE 5W-20, 5W-30 AND 10W-30 exceed the demanding requirements of the International Lubricant Standardization and Approval Committee (ILSAC) GF-5. GF-5 is the latest standard for passenger car, van, light-duty truck and sport utility engine oils. It also exceeds API SN Service Classification requirements. Always consult your owner's manual for correct viscosity choice and API Service Classification requirements.

SHIPPING INFORMATION:

Pack	6/1 Quart	55 Gallon Drum
Unit Weight (lbs.)	2.1	450
Case/Pallet Weight*	12.3/2108	1850
Units per Pallet	1008	4
Cases per Pallet	168	-
Units per Truck	24192	84
Cases/Pallets per Truck	4032/24	21
Case Size (inches)	8.9 x 7.4 x 8.8	-
Cases per row/Rows high	24/7	-
Pallet Size (inches)	48 x 40 x 72.3	46X48X40.5

(*) Including pallet weight of 50 lbs.

PRODUCT INFORMATION:

	5W-20	5W-30	10W-30
Quart Part Number	P2MB576	P3MB576	
Drum Part Number	P2MB51	P3MB51	
Bulk Part Number	P2MS50	P3MS50	P3MS10
ILSAC	GF-5	GF-5	GF-5
API	SN	SN	SN
Test (Method)	**5W-20**	**5W-30**	**10W-30**
Specific Gravity @ 60 °F (ASTM D-4052)	0.8614	0.8608	0.8713
Viscosity			
'@ 40 °C, cSt (ASTM D-445)	49.68	63.05	66.68
'@ 100 °C, cSt (ASTM D-445)	8.55	10.6	10.4
Viscosity Index (ASTM D-2270)	150	158	138
Pour Point	-46°C	-45°C	-41°C
Flash Point (ASTM D-92)	206°C	204°C	204°C
Noack Volatility %	14.2	14.3	12

	5W-20	5W-30
Quart UPC Code	0-74804-05322-7	0-74804-05323-4
Case UPC Code	0-74804-15322-4	0-74804-15323-1
Case SCC-14 Code	1-00-74804-05322-4	1-00-74804-05323-1
55 Gallon Drum UPC Code	0-74804-05354-8	0-74804-05355-5

AMERICAN PETROLEUM INSTITUTE FOR GASOLINE ENGINES CERTIFIED

OFFICIAL MOTOR OIL OF michael waltrip racing

PEAK MOTOR OIL

PERFORMANCE WITHOUT COMPROMISE

At PEAK, we're the independent guys, running a family owned business that's nothing like Big Oil. Here, American made quality and value go into good, honest products, with everything your engine needs to run right for the long haul.

CHECK OUT OUR OTHER TRUSTED PRODUCTS

Clint Bowyer

Connect with PEAK

You Tube PEAKAUTO

WWW.PEAKAUTO.COM

HANDLING AND SAFETY INFORMATION Refer to Old World Industries Material Safety Data Sheet (MSDS). The MSDS is available from your PEAK Performance Supplier at www.peaklubricants.com, or by calling Old World Industries' PEAK technical support line at 1-800-477-5847.

"Clint Bowyer" is a registered trademark of Clint Bowyer. His name and likeness are used under license by Clint Bowyer Racing, Inc. Stylized #15 is a pending trademark of Michael Waltrip Racing Holdings, LLC and is used under license. Michael Waltrip Racing logo, stylized #15, and the likeness of the #15 race car are trademark/pending trademarks (#15) of Michael Waltrip Racing Holdings, LLC and are used under license.
TOYOTA AND ALL ASSOCIATED MARKS, EMBLEMS AND DESIGNS ARE INTELLECTUAL PROPERTY RIGHTS OF TOYOTA MOTOR CORPORATION AND USED WITH PERMISSION.

Old World Industries, LLC

We Support Be Car Care Aware™ www.carcare.org

RUN TRUE™

Distributed by Old World Industries, LLC Northbrook, IL 60062
p 800.323.5440 www.peakauto.com

©2013 PEAK and the PEAK Mountain Graphic are Registered Trademarks of Old World Industries, LLC.